



No ROHS hazardous material

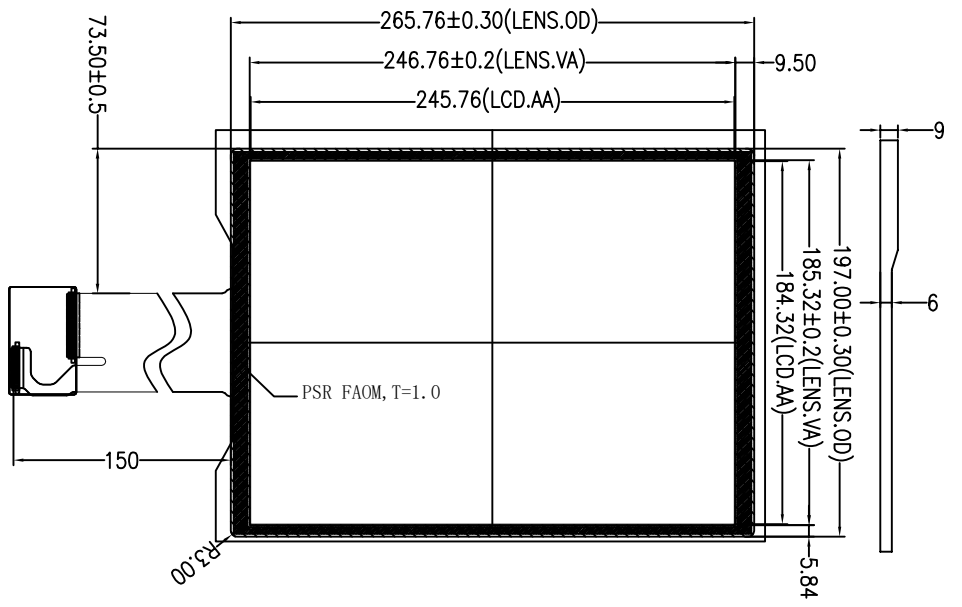


Screen printing area: Print Black

Front view

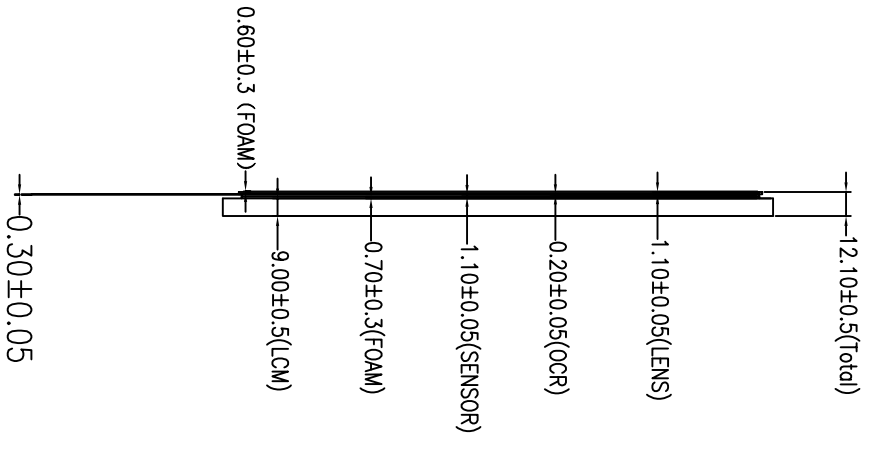


Foam area: Single-sided Adhesive=0.6MM

Side view

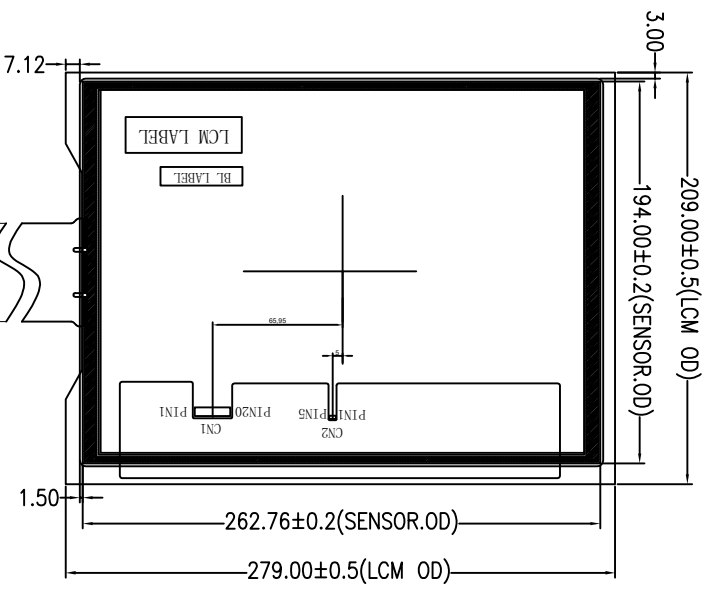

Connector : Molex-532610471 (USB)



Back view

SCALE 2:1

Technical Parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+G+LCM	8. Transmittance:	≥85%
3. IC Solutions:	ILI2302	9. Surface hardness:	≥6H
4. Impact resistance:	30.000N, SteelBall 125000Hit/Sec/Time	10. Operate :	-20°C~+70°C, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30°C~+80°C, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance as±0.3	

USB Connector (11)

1	VCC(5V)
2	DN
3	DP
4	GND

TFT M121GNX2 R1 > PIN:

1	VDD	2	VDD	3	VSS	4	REV	5	RV1-	6	RV1+	7	VSS	8	RV2-	9	RV2+	10	VSS
11	VDD	12	VDD	13	VSS	14	RV3-	15	RV3+	16	VSS	17	RV4-	18	RV4+	19	SE168	20	BIST



杭州宏晷科技有限公司
Grahwolet Technology CO., Ltd

Model	HX1211702	View Direction		Unit	MM
Version	V1.0	Designer	LU0	Date	2017-4-11
Customer		Approved	HBZ	Date	2017-4-11
				Proportion	1:1